

Description

The DCV2 and DCV3 disc check valves are of the wafer pattern designed to be sandwiched between flanges. They are suitable for use on a wide range of fluids for applicators in process lines, hot water systems, steam and condensate systems etc. Face-to-face dimensions conform to EN 558 part 1, series 49.

Sizes and pipe connections

DN15,20,25,32,40,50,65,80,100

Suitable for installation between BS 10 Tables 'E' and 'H',

BS 4504/(DIN) PN6, 10, 16, 25, 40;

JIS 5, 10, 16, 20 flanges with the following exceptions: DN40, 50, 80 and 100 - will not fit between JIS 5 flanges

DN65 and 80 - will not fit between BS 10 'E' flanges.

Optional extras

Heavy duty springs (700 mbar opening pressure, up to DN65) for boiler feed applications. Viton soft seats for oil, gas and steam applications.

EPDM soft seats for water applications.

Limiting conditions

Note: Special testing to allow lower temperature operation can be provided at extra cost. Consult Spirax Sarco.

DCV2


Body design conditions		PN40
PMO - Maximum operating pressure		40 bar g
TMO - Operating Pressure	Max. Standard spring	300°C
	Heavy duty spring	300°C
	High temperature spring	
	Without spring	300°C
Minimum operating temperature (standard disc)		-60°C
Temperature limits	Viton seat	-15°C to +250°C
	EPDM seat	-50°C to +150°C

Designed for a max. cold hydraulic test pressure of 60 bar g

DCV3

Body design conditions		PN40
PMO - Maximum operating pressure		40 bar g
TMO - Operating Pressure	Max. Standard spring	300°C
	Heavy duty spring	300°C
	High temperature spring	400°C
	Without spring	400°C
Minimum operating temperature (standard disc)		-10°C
Temperature limits	Viton seat	-10°C to +250°C
	EPDM seat	-10°C to +150°C

Designed for a max. cold hydraulic test pressure of 60 bar g

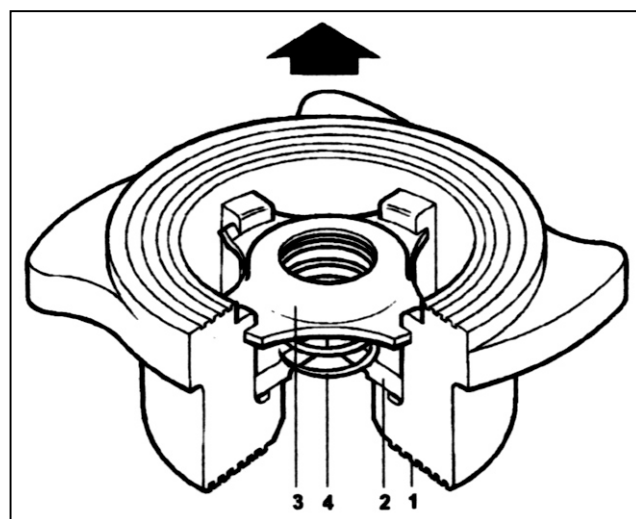

Material

No.	Part	Material	
1	Body DCV2	Ferritic stainless steel	WS 1.4313
		DCV3	Austenitic stainless steel
2	Disc	Austenitic stainless steel	BS 1449 316 S11
3	Spring retainer	Austenitic stainless steel	BS 1449 316 S11
	Standard spring	Austenitic stainless steel	BS 2056 316 S42
4	Heavy duty spring	Austenitic stainless steel	BS 2056 316 S42
	High temp. spring	Nickel alloy	Nimonic90

Note: Special testing to allow lower temperature operation can be provided at extra cost. Consult Spirax Sarco

Certification

The DCV2 and DCV3 is available with certification to EN 10204 2.2. The DCV3 is also available with certification to EN 10204 3.1.B.


Note: All certification/inspection requirements must be stated at the time of order placement.

Standards

Designed and manufactured in accordance with BS 7438.

Standard shut-off

Standard valves conform to DIN 3230 part 3, BN2. Valves conforming to DIN 3230 part 3, B03 available on request. Soft seated versions meet DIN 3230 part 3 BN1 and B01 provided a differential pressure exists.

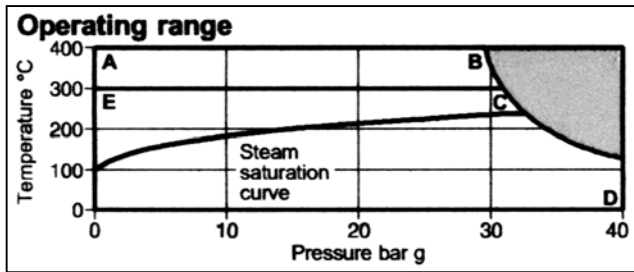

The product must not be used in this region.

E-C-D DCV2 and OCV3 with standard spring.
A-B-D DCV3 High temperature spring and without spring.

Dimensions/weights (approximate) In mm and kg

Size	A	B	C	D	E	F	Weight
DN15	60.0	43	38	16.0	29.0	15	0.13
DN20	69.5	53	45	19.0	35.7	20	0.19
DN25	80.5	63	55	22.0	44.0	25	0.32
DN32	90.5	75	68	28.0	54.5	32	0.55
DN40	1010	85	79	31.5	65.5	40	0.74
DN50	1150	95	93	40.0	77.0	50	1.25
DN65	142.0	115	113	46.0	97.5	65	1.87
DN80	1540	133	128	50.0	111.5	80	2.42
DN100	184.0	154	148	60.0	130.0	100	3.81

K_v values

DN	15	20	25	32	40	50	65	80	100
K _v	4.4	6.8	10.8	17	26	43	60	80	113

For conversion

$C_v(\text{UK}) = K_v \times 0.97$

$C_v(\text{US}) = K_v \times 1.17$

Opening pressures in mbar

Differential pressures with zero flow for standard and high temperature springs.

→ Flow direction

DN	15	20	25	32	40	50	65	80	100
↑	25	25	25	27	28	29	30	31	33
→	22.5	22.5	22.5	23.5	24.5	24.5	25	25.5	26.5
↓	20	20	20	20	20	20	20	20	20

Where lowest opening pressures are required, valves without springs can be installed in vertical pipes with bottom-to-top flow.




Without spring

↑	2.5	2.5	2.5	3.5	4.0	4.5	5	5.5	6.5
---	-----	-----	-----	-----	-----	-----	---	-----	-----

Heavy duty springs approximately 700 mbar

Operation

Disc check valves are opened by the pressure of the fluid and closed by the spring as soon as the flow ceases and before the reverse flow occurs.

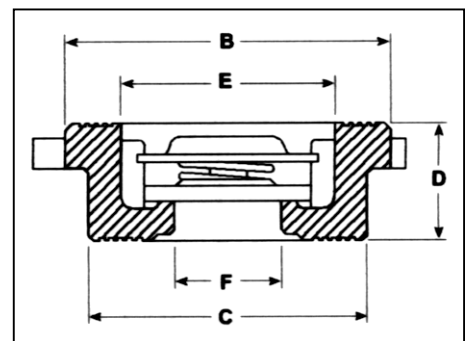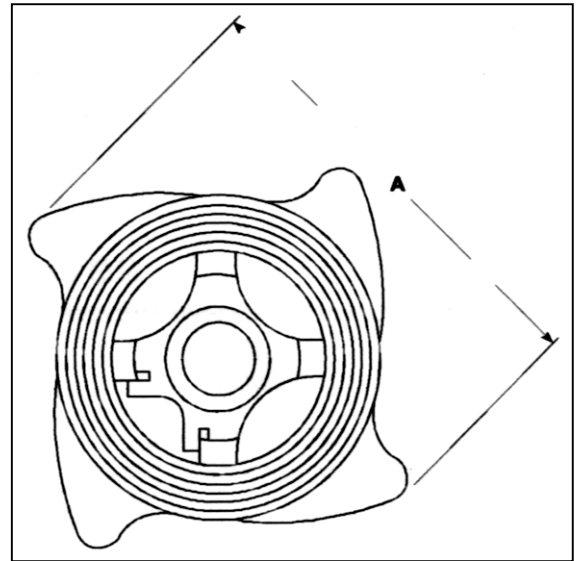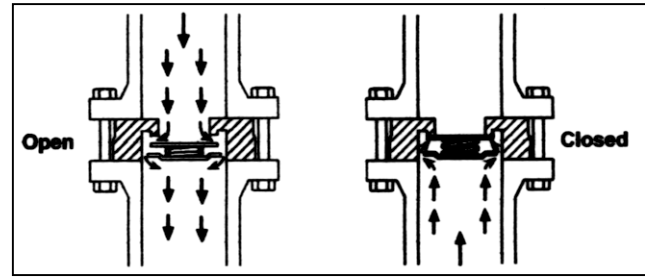

Safety information, installation and maintenance

For full details see the Installation and Maintenance Instructions (IM-P134-07) supplied with the product. DCV disc check valves must be fitted in accordance with the direction of flow arrow indicating correct fluid flow direction. When fitted with a spring they can be installed in any plane. When supplied without a spring they must be fitted in a vertical flow line with the flow from bottom-to-top.

The 'cam' design of the body allows the various flange types to be accommodated. The body is rotated to touch the flange joint bolts ensuring that the valve is centred in the pipeline.

* **Note:** Flanges, bolts (or studs), nuts and joint gaskets are to be provided by the installer. Disc check valves are non-maintainable (no spares are available). Disc check valves are not suitable for use where heavily pulsating flow exists, such as close to a compressor.



Various options are denoted by a marking on the valve body:

N	High temp. spring	Standard metal disc
W	Without spring	Standard metal disc
H	Heavy duty spring	Standard metal disc
V	Standard spring	Viton soft faced disc
E	Standard spring	EPDM soft faced disc
WV	Without spring	Viton soft faced disc
WE	Without spring	EPDM soft faced disc
HV	Heavy duty spring	Won soft faced disc
HE	Heavy duty spring	EPDM soft faced disc
T	Valves tested to DIN 3230 part 3, B03	

No identification indicates a standard spring with a metal disc.

Disposal

If a product, which contains a Viton component, has been subjected to a temperature approaching 315°C or higher, then it may have decomposed and formed hydrofluoric acid. Avoid skin contact and inhalation of any fumes, as the acid will cause deep skin burns and damage to the respiratory system. Viton must be disposed of in a recognised manner as stated in the Installation and Maintenance Instructions (IM-P134-07). No other ecological hazard is anticipated with the disposal of this product providing due care is taken.

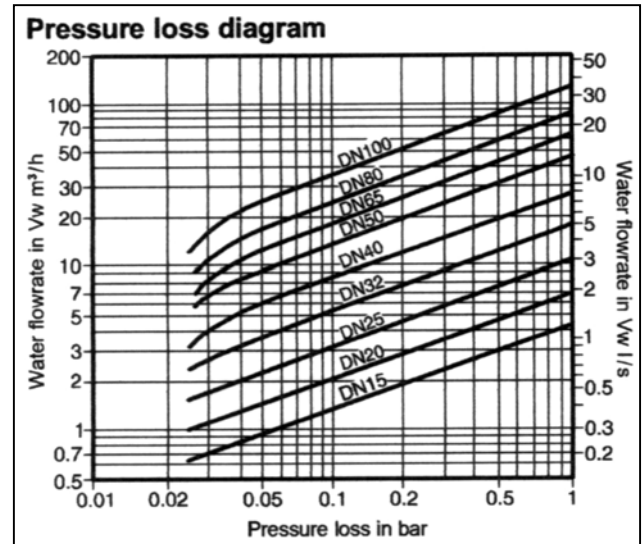

Pressure loss diagram with open valve at 20°C. The values indicated are applicable to spring loaded valves with horizontal flow. With vertical flow, insignificant deviations occur only within the range of partial opening.

The curves given in the chart are valid for water at 20°C. To determine the pressure for other fluids the equivalent water volume flow rate must be calculated and used in the graph.

$$\dot{V}_w = \sqrt{\frac{\rho}{1000}} \times \dot{V}$$

Where: \dot{V}_w = Equivalent water volume flow in l/s or m³/h

ρ = Density of fluid kg/m³

\dot{V} = Volume of fluid l/s or m³/h

Pressure loss information for steam, compressed air and gases is available from Spirax Sarco.

How to order

Example: 1 off Spirax Sarco DN50, DCV3 austenitic stainless steel disc check valve for fitting between BS 4504 PN25 flanges.

[CLICK FOR ADDRESS](#)